



Linde Material Handling

Linde



Electric Pallet Truck

MT15 C

Capacity 1.5 t | Series 1131-02



Compact transporter

- 0.75 kW electric drive accelerates and facilitates load transport up to 1.5 tons and increases handling performance in the warehouse
- Compact design ensures best maneuverability in confined spaces
- Easy maneuverability and electric drive relieve employees of physically demanding transport tasks

TECHNICAL DATA (According to VDI 2198)

Characteristics	1.1	Manufacturer		Linde
	1.2	Model		MT15 C
	1.2.a	Series		1131-02
	1.3	Operation		Battery
	1.4	Operator type		Pedestrian
	1.5	Load capacity	Q (t)	1.5
	1.6	Load centre distance	c (mm)	600
	1.8	Load distance	x (mm)	950 (880)
	1.9	Wheelbase	y (mm)	1190 (1120)
Weights	2.1	Service weight	(kg)	115
	2.2	Axle load with load, front/rear	(kg)	540/1075
	2.3	Axle load without load, front/rear	(kg)	100/15
Wheels/Tyres	3.1	Tyres rubber, SE, pneumatic, polyurethane		PU
	3.2	Tyre size, front	(mm)	Φ 210 × 70
	3.3	Tyre size, rear	(mm)	Φ 80 × 60 (Φ 74 × 88)
	3.5	Wheels, number front/rear (x = driven)	(mm)	1x/4 (1x/2)
	3.7	Track width, rear	b11 (mm)	410 (535)
Dimensions	4.4	Lift height	h3 (mm)	115
	4.9	Height drawbar in driving position min./max.	h14 (mm)	750/1190
	4.15	Lowered height	h13 (mm)	80
	4.19	Overall length	l1 (mm)	1550
	4.20	Length to face of forks	l2 (mm)	400
	4.21	Overall width	b1/b2 (mm)	560 (685)
	4.22	Fork dimensions	s/e/l (mm)	50 × 150 × 1150
	4.25	Distance between fork-arms	b5 (mm)	560 (685)
	4.32	Ground clearance, center of wheelbase	m2 (mm)	30
	4.34	Aisle width for pallets 800 × 1200 lengthways	Ast (mm)	2062
4.35	Turning radius	Wa (mm)	1390	
Performance	5.1	Travel speed, laden/unladen	(km/h)	4/4.5
	5.2	Lifting speed, laden/unladen	(m/s)	0.017/0.024
	5.3	Lowering speed, laden/unladen	(m/s)	0.09/0.06
	5.8	Max. gradeability, laden/unladen	(%)	6/16
	5.10	Service brake type		Electric
Drive	6.1	Drive motor rating S2 60 min	(kW)	0.75
	6.2	Lift motor rating at S3 15 %	(kW)	0.5
	6.3	The maximum allowed size battery	(mm)	230 × 260 × 85
	6.4	Battery voltage/nominal capacity K5	(V/Ah)	24/20
	6.5	Battery weight	(kg)	5
	6.6	Energy consumption acc. to VDI cycle	(kWh/h)	0.274
Others	8.1	Type of drive unit		DC
	10.5	Steering type		Mechanical
	10.7	Sound pressure level LpAZ (at the driver's seat)	(dB(A))	< 74



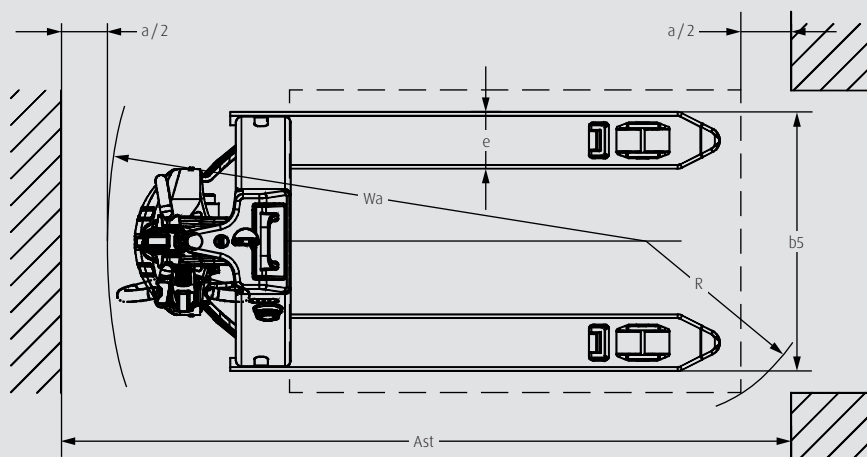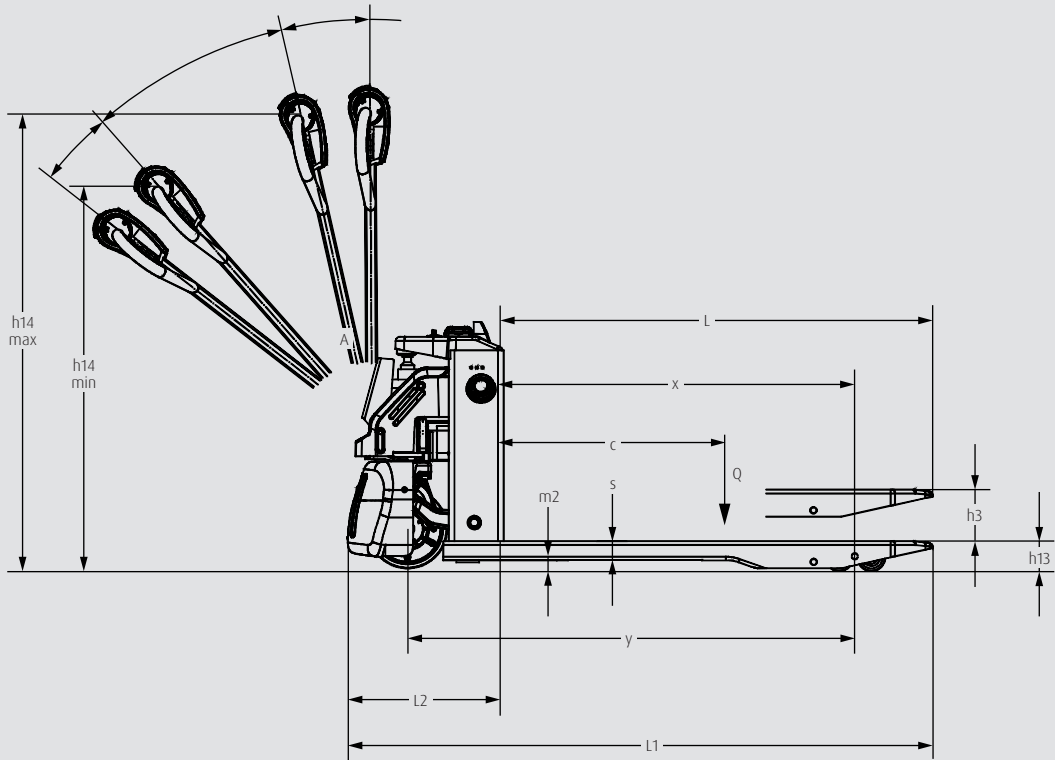


CHARACTERISTICS



Long tiller mounted on low chassis

Safety

- Safety distance due to long drawbar protects against accidents
- Low chassis prevents injuries to the feet
- Automatic electromagnetic brake and belly switch reduce risk of accidents
- Efficient parking brake prevents the pallet truck from rolling away on loading ramps or slopes

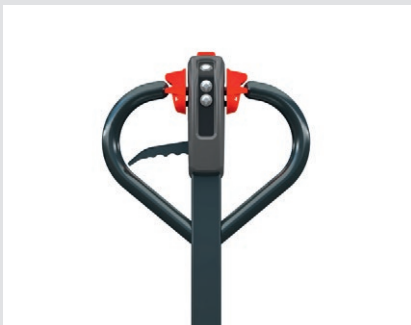

All controls ergonomically integrated in the Linde tiller head

Ergonomics

- Compact chassis and small turning circle ensure best maneuverability in confined spaces
- Creep speed with vertical tiller arm enables precise, smooth steering
- Ergonomically shaped tiller head facilitates operation with both hands using the dual butterfly lever
- The Curtis control enables sensitive load handling and individual adjustment of speed and acceleration



Optimal visibility of the forks and load at all time

Handling

- Effortless load handling over gradients up to 6 percent thanks to electric drive
- The reinforced forks carry up to 1.5 tons load
- Fast transport over short distances with maximum speed of 4.5 km/h
- Stepless lowering of the forks enables precise lowering of the load



Easy plug and play Li-ION battery

Service

- The robust DC motor enables long maintenance intervals and reduces operating costs
- The maintenance and emission-free lithium-ion battery system enables non-stop operation for up to 1.7 hours
- Short charging cycle and opportunity charging provide long operating times
- Easy battery replacement via plug-and-play

Subject to modification in the interest of progress. Illustrations and technical details could include options and not binding for actual constructions. All dimensions subject to usual tolerances.



ncnielsen

Nørregade 66, 7860 Balling | Tlf.: 99 83 83 83
nc-nielsen.dk | info@nc-nielsen.dk